TEST REPORT

CheckCode:192344
Report No.:C202613027966E

Company Name: Hezhou Sufeng Wood Co., Ltd.
Address: Chaojiang Wood Industrial Park of Zhangmulin Village, Zhaoping County, Guangxi, China.

The following sample information is provided by the client and responsible for its authenticity

Sample Name:	MDF
Type of Samples:	MDF
Thickness:	12mm
Lot Number:	20251217
Production Date:	2025-12-17
Sampling Date:	2026-01-26
Visit Number:	Y3Q3
Sample State:	Normal

Date of Receipt: Mar.16, 2026 Test Period: Mar.16, 2026 – Mar.31, 2026

Test Request: As specified by client, to determine Formaldehyde (HCHO) Content in the submitted sample

Test Result: Please refer to following page(s).

Edited by Cheng Wanfen Reviewed by Li Wei Approved by Zheng Xiaoping

扫一扫 验真伪

GRG METROLOGY&TEST GROUP CO.,LTD. APPROVED(02)

Issue date:Apr.2,2026

The result(s) shown in this report refer(s) only to the sample(s) tested. This report is considered invalid without approved signature, special seal for inspection and testing and the seal on the perforation.This report cannot be reproduced except in full, without prior written approval of the company.Any disagreements of the test report should be fed back to us within 15 workdays upon receiving the report. Scan the QR code on the first page of the test report, or log on to the official website http://www.grgtmall.com, enter the report number and check code to check the authenticity of the report. If you have any questions, please contact the email grgtest@grgtest.com. GRGT assumes no responsibility for information leakage caused by improper management of the QR code and the check code by customers.

GRG METROLOGY & TEST GROUP CO., LTD.
Add: No.8,Chuangyun Road,Panyu District,Guangzhou,Guangdong,China
Tel: 4006020999 Fax: +86-020-38698685 Website: http://www.grgtest.com

TEST REPORT

CheckCode:192344
Report No.:C202613027966E

Test result(s) summary

Test Request	Result
Final Regulation Order – Airborne Toxic Control Measure to Reduce Formaldehyde Emissions from Composite Wood Product (CARB ATCM), title 17, California Code of Regulation, section 93120.2 (a) – Formaldehyde Emission Test for Composite Wood Products	PASS
US EPA 40 CFR Part 770.10, Toxic Substances Control Act (TSCA) Title VI – Formaldehyde Emission Test for Composite Wood Products	PASS

Note: 1) The scope of CARB ATCM / TSCA Title VI is/are applicable for composite wood, but not for other wood products.

2) Formaldehyde emission test is one of the conformity criteria under CARB ATCM / TSCA Title VI. Full conformity of a composite wood product happens provided that this composite wood fulfill all the requirement as stated in CARB ATCM title 17 section 93120 to 93120.12 / US EPA 40 CFR Part 770.10.

Sample description

Thickness	Description
12mm	MDF

TEST REPORT

CheckCode:192344
Report No.:C202613027966E

Test Result(s):

Test method: With reference to ASTM D6007-14, analysis was performed by UV-Vis.
Sample conditioning :

Average Temperature and Relative Humidity 23.1℃, 50.0%RH,
Range of Temperature and Relative Humidity 21.0~27.0℃, 45~55%RH,
Sampling Time 168h,
Formaldehyde background: <0.10ppm

Sample Detailes and Apparatus :

Chamber Dimensions 1578×800×800mm
Chamber Volume 1m^3
Chamber Load Ratio 0.39 m^2/ m^3
Chamber Q/A Ratio 1.905
Sample Size (as received) 25.7cm × 25.6cm × 1.22 cm
Number of Samples: 3
Number of Exposed Surfaces: 6

Sampling Parameters of Emission Test:

Average Temperature and Relative Humidity 25.0℃,50.0%RH,
Range of Temperature and Relative Humidity 24.0~26.0℃, 46~54%RH,
Air-sampling Time: 30min.
Time of Samples in Chamber before Air Sample Collection: 240min.
Air-sampling Rate: 1.0 L/min
Formaldehyde background: <0.01ppm

Test Item 1	Background			Unit	MDL
	1	2	3		
Formaldehyde Emission	N.D.	N.D.	N.D.	ppm	0.01

Test Item 1	Sample			Unit	MDL
	Trial 1	Trial 2	Trial 3		
Formaldehyde Emission	0.098	0.091	0.097	ppm	0.01

TEST REPORT

CheckCode:192344
Report No.:C202613027966E

Test Item 1	Sample				Unit	MDL	MDF Maximum Permissible Limit	Conclusion
	Trial 1	Trial 2	Trial 3	Average				
Formaldehyde Emission (Corrected)	0.097	0.091	0.097	0.09	ppm	0.01	0.11	PASS

Remark: 1) ppm = parts of formaldehyde per million parts air

2) MDL = Method Detection Limit

3) “N.D.” = Not Detected (Below Method Detection Limit)

4) Formaldehyde Emission (Corrected) is formaldehyde concentration corrected to 25 ℃, 50%RH.

5) Reference Information: Maximum Permissible Limit according to Section 93120.2,Titl17, California Code of Regulation, CARB-ATCM:

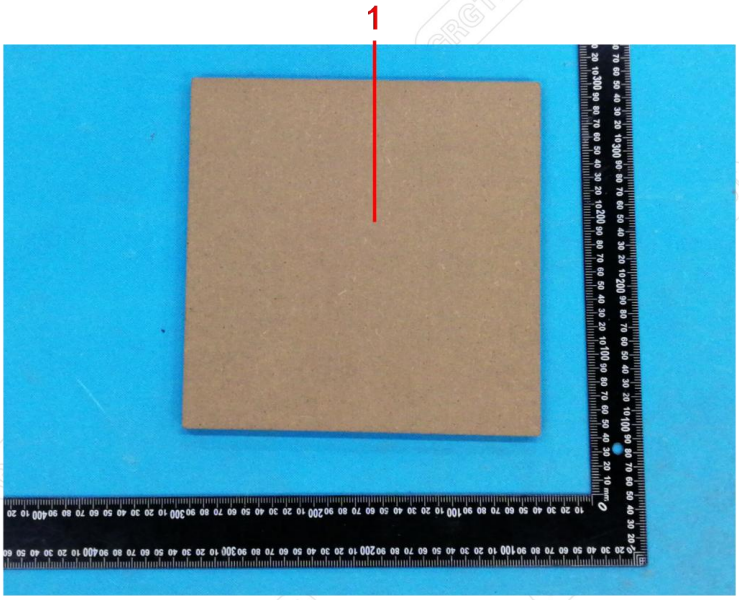
Table 1: Phase 2 Formaldehyde Emission Standards for Hardwood Plywood(HWPW), Particleboard(PB), and Medium Density Fiberboard(MDF)			
HWPW	PB	MDF	Thin MDF
0.05 ppm	0.09 ppm	0.11 ppm	0.13 ppm

Maximum Permissible Limit according to TSCA Title VI, 40 CFR Part 770, Code of Federal Regulation:

Table 2: Formaldehyde Emission Standards for Hardwood Plywood(HWPW), Particleboard(PB), Medium Density Fiberboard(MDF), and Laminated Product				
HWPW	PB	MDF	Thin MDF	Laminated Product
0.05 ppm	0.09 ppm	0.11 ppm	0.13 ppm	0.05 ppm

TEST REPORT

CheckCode:192344
Report No.:C202613027966E

Photo of Sample


Unless otherwise stated,the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule(w=0) stated in ILAC-G8:09/2019/ CNAS-GL015:2022.

----------End of Report----------

GRG METROLOGY & TEST GROUP CO., LTD.
Add: No.8,Chuangyun Road,Panyu District,Guangzhou,Guangdong,China
Tel: 4006020999 Fax: +86-020-38698685 Website: http://www.grgtest.com