TEST REPORT

EN 62368-1

Audio/video, information and communication technology equipment Part 1: Safety requirements

Report Number. .....:	LST211098002LR
Date of issue .....:	Nov. 03, 2021
Testing Laboratory.....:	**Shenzhen LST Technology Co., Ltd.**
Address.....:	Huichao Building, Yintian Industry zone,Bao'an District, Shenzhen, Guangdong P.R. China
Applicant's name.....:	Xinshengyuan Electronic Technology Co., Ltd.
Address.....:	Ximeizhu Industrial Park, Simapu Town, Chaonan District, Shantou City, Guangdong Province
Test specification:	
Standard.....:	EN 62368-1:2020+A11:2020
	IEC 62368-1:2018
Test procedure.....:	LVD
Non-standard test method……..:	N/A
Test Report Form No. .....:	**IEC62368_1B**
Test Report Form(s) Originator.....:	UL(US)
Master TRF .....:	2014-03

Copyright © 2010 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description ..... :	Power Adapter
Trade Mark.....:	N/A
Manufacturer.....:	Xinshengyuan Electronic Technology Co., Ltd.
	Ximeizhu Industrial Park, Simapu Town, Chaonan District, Shantou City, Guangdong Province
Model/Type reference .....:	XSY-1210
Ratings.....:	Input: AC100-240V,50/60Hz Output: DC12V,1A

Testing procedure and testing location:

Testing Laboratory..... :	**Shenzhen LST Technology Co., Ltd.**
Address ..... :	Huichao Building, Yintian Industry zone,Bao'an District, Shenzhen, Guangdong P.R. China
Date of Test..... :	Oct. 27, 2021-Nov. 03, 2021
Tested by (name + signature)..... :	
Reviewed by (name + signature)..... :	
Approved by (name + signature)..... :	

Summary of testing:	
Tests performed (name of test and test clause): -- EN 62368-1:2020+A11:2020; The submitted samples were found to comply with the requirements of above specification.	**Testing location:** Huichao Building, Yintian Industry zone,Bao'an District, Shenzhen, Guangdong P.R. China

Copy of marking plate

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

(Additional requirements for markings. See 1.7 NOTE)

Power Adapter

Model: XSY-1210

Input: AC 100-240V,50/60Hz

Output:DC12V,1A



Manufacturer: Xinshengyuan Electronic Technology Co., Ltd.

Address: Ximeizhu Industrial Park, Simapu Town, Chaonan District, Shantou City, Guangdong Province

Remark on above marking:

1, The height of CE symbols is more than 5 mm;

TEST ITEM PARTICULARS:	
Classification of use by ..... :	☒ Ordinary person ☐ Instructed person ☐ Skilled person ☐ Children likely to be present
Supply Connection ..... :	☒ AC Mains ☐ DC Mains ☐ External Circuit - not Mains connected - ☐ ES1 ☐ ES2 ☐ ES3
Supply % Tolerance ..... :	☒ +10%/-10% ☐ +20%/-15% ☐ +____%/ -_____% ☐ None
Supply Connection – Type ..... :	☒ pluggable equipment type A - ☐ non-detachable supply cord ☐ appliance coupler ☒ direct plug-in ☐ mating connector ☐ pluggable equipment type B - ☐ non-detachable supply cord ☐ appliance coupler ☐ permanent connection ☐ mating connector ☐ other:
Considered current rating of protective device as part of building or equipment installation ..... :	Installation location: ☒ building; ☐ equipment; ☐ N/A
Equipment mobility ..... :	☒ movable ☐ hand-held ☒ transportable ☐ stationary ☐ for building-in ☐ direct plug-in ☐ rack-mounting ☐ wall-mounted
Over voltage category (OVC) ..... :	☐ OVC I ☒ OVC II ☐ OVC III ☐ OVC IV ☐ other:
Class of equipment ..... :	☐ Class I ☒ Class II ☐ Class III
Access location ..... :	☒ restricted access location ☐ N/A
Pollution degree (PD) ..... :	☐ PD 1 ☒ PD 2 ☐ PD 3
Manufacturer's specified maxium operating ambient:	30°C
IP protection class ..... :	☒ IPX0 ☐ IP___
Power Systems ..... :	☒ TN ☐ TT ☐ IT - ____ V_{L-L} ☐ N/A
Altitude during operation (m) ..... :	☒ 2000 m or less ☐ _____ m
Altitude of test laboratory (m) ..... :	☒ 2000 m or less ☐ _____ m

Mass of equipment (kg) ..... :	☒ 64.8g
POSSIBLE TEST CASE VERDICTS:	
- test case does not apply to the test object ..... :	N/A
- test object does meet the requirement ..... :	P (Pass)
- test object does not meet the requirement ..... :	F (Fail)
TESTING:	
Date of receipt of test item ..... :	Oct. 27, 2021
Date (s) of performance of tests ..... :	Oct. 27, 2021- Nov. 03, 2021

GENERAL REMARKS:

"(See Enclosure #)" refers to additional information appended to the report.
"(See appended table)" refers to a table appended to the report.

Throughout this report a ☐ comma / ☒ point is used as the decimal separator.

When differences exist; they shall be identified in the General product information section.

GENERAL PRODUCT INFORMATION:

Product Description:

The equipment is a Power Adapterfor general use.

Model Differences:

N/A

Additional application considerations – (Considerations used to test a component or sub-assembly) –

N/A

ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:

(Note 1: Identify the following six (6) energy source forms based on the origin of the energy.)
(Note 2: The identified classification e.g., ES2, TS1, should be with respect to its ability to cause pain or injury on the body or its ability to ignite a combustible material. Any energy source can be declared Class 3 as a worse case classification e.g. PS3, ES3.

Electrically-caused injury (Clause 5):

(Note: Identify type of source, list sub-assembly or circuit designation and corresponding energy source classification)
Example: +5 V dc input ES1

Source of electrical energy	**Corresponding classification (ES)**
Primary circuit	ES3
Output	ES1

ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:	
Electrically-caused fire (Clause 6): (Note: List sub-assembly or circuit designation and corresponding energy source classification) Example: Battery pack (maximum 85 watts): PS2	
Source of power or PIS	**Corresponding classification (PS)**
All circuits inside the equipment	PS3, Arcing PIS, resistive PIS
Output circuit (Accessible terminals)	PS1
Injury caused by hazardous substances (Clause 7) (Note: Specify hazardous chemicals, whether produces ozone or other chemical construction not addressed as part of the component evaluation.) Example: Liquid in filled component Glycol	
Source of hazardous substances	**Corresponding chemical**
/	/
Mechanically-caused injury (Clause 8) (Note: List moving part(s), fan, special installations, etc. & corresponding MS classification based on Table 35.) Example: Wall mount unit MS2	
Source of kinetic/mechanical energy	**Corresponding classification (MS)**
Edges and corners of enclosure	MS1
Mass of the unit	MS1
Thermal burn injury (Clause 9) (Note: Identify the surface or support, and corresponding energy source classification based on type of part, location, operating temperature and contact time in Table 38.) Example: Hand-held scanner – thermoplastic enclosure TS1	
Source of thermal energy	**Corresponding classification (TS)**
External surface of the apparatus	TS1 (Consider room ambient of 25 °C)
Radiation (Clause 10) (Note: List the types of radiation present in the product and the corresponding energy source classification.) Example: DVD – Class 1 Laser Product RS1	
Type of radiation	**Corresponding classification (RS)**
N/A	N/A

ENERGY SOURCE DIAGRAM
Indicate which energy sources are included in the energy source diagram. Insert diagram below
☒ **ES** ☒ **PS** ☒ **MS** ☒ **TS** ☐ **RS**
Note: for circuit diagram , refer to Appendix 1

OVERVIEW OF EMPLOYED SAFEGUARDS				
Clause	**Possible Hazard**			
5.1	Electrically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (ES3: Primary Filter circuit)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosur)
N/A	--	--	--	--
6.1	Electrically-caused fire			
Material part (e.g. mouse enclosure)	Energy Source (PS2: 100 Watt circuit)	Safeguards		
		Basic	Supplementary	Reinforced
Combustible material	PS2	No parts exceeding 90% of its spontaneous Ignition temperature	1. PCBs (Main board and battery pack unit) are complied 2. with V-0 material. 3. Provided fire enclosure: V-0 material.	--
7.1	Injury caused by hazardous substances			
Body Part (e.g., skilled)	Energy Source (hazardous material)	Safeguards		
		Basic	Supplementary	Reinforced
N/A	--	--	--	--
8.1	Mechanically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (MS3:High Pressure Lamp)	Safeguards		
		Basic	Supplementary	Reinforced (Enclosur)
Ordinary person	MS1	--	--	--
9.1	Thermal Burn			
Body Part (e.g., Ordinary)	Energy Source (TS2)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary	TS1	--	--	--
10.1	Radiation			
Body Part (e.g., Ordinary)	Energy Source (Output from audio port)	Safeguards		
		Basic	Supplementary	Reinforced
N/A	--	--	--	--
Supplementary Information: (1) See attached energy source diagram for additional details. (2) “N” – Normal Condition; “A” – Abnormal Condition; “S” Single Fault				

EN 62368-1			
Clause	Requirement + Test	Result - Remark	Verdic
4	**GENERAL REQUIREMENTS**		P
4.1.1	Acceptance of materials, components and subassemblies		P
4.1.2	Use of components		P
4.1.3	Equipment design and construction		P
4.1.15	Markings and instructions ..... :	(See Annex F)	P
4.4.4	Safeguard robustness		P
4.4.4.2	Steady force tests ..... :	(See Annex T.4)	P
4.4.4.3	Drop tests..... :	(See Annex T.7)	P
4.4.4.4	Impact tests..... :	Transportable equipment	N/A
4.4.4.5	Internal accessible safeguard enclosure and barrier tests ..... :	No such enclosure and barrier	N/A
4.4.4.6	Glass Impact tests..... :		N/A
4.4.4.7	Thermoplastic material tests ..... :	(See Annex T.8)	P
4.4.4.8	Air comprising a safeguard ..... :	No such safeguard used	N/A
4.4.4.9	Accessibility and safeguard effectiveness	All other safeguards remain effective and no class 3 energy sources become accessible.	P
4.5	Explosion		N/A
4.6	Fixing of conductors		P
4.6.1	Fix conductors not to defeat a safeguard		P
4.6.2	10 N force test applied to ..... :		P
4.7	Equipment for direct insertion into mains socket - outlets		P
4.7.2	Mains plug part complies with the relevant standard ..... :		P
4.7.3	Torque (Nm)..... :		P
4.8	Products containing coin/button cell batteries	No such battery used	N/A
4.8.2	Instructional safeguard		N/A
4.8.3	Battery Compartment Construction		N/A
	Means to reduce the possibility of children removing the battery ..... :		—
4.8.4	Battery Compartment Mechanical Tests ..... :		N/A
4.8.5	Battery Accessibility		N/A
4.9	Likelihood of fire or shock due to entry of conductive object ..... :		P

EN 62368-1			
Clause	Requirement + Test	Result - Remark	Verdic
5	**ELECTRICALLY-CAUSED INJURY**		P
5.2.1	Electrical energy source classifications.....:	ES1	P
5.2.2	ES1, ES2 and ES3 limits		P
5.2.2.2	Steady-state voltage and current.....:		N/A
5.2.2.3	Capacitance limits .....:		N/A
5.2.2.4	Single pulse limits.....:		N/A
5.2.2.5	Limits for repetitive pulses.....:		N/A
5.2.2.6	Ringing signals .....:		N/A
5.2.2.7	Audio signals .....:	See clause E.1	N/A
5.3	Protection against electrical energy sources		P
5.3.1	General Requirements for accessible parts to ordinary, instructed and skilled persons		P
5.3.2.1	Accessibility to electrical energy sources and safeguards		P
5.3.2.2	Contact requirements		P
	a) Test with test probe from Annex V.....:		P
	b) Electric strength test potential (V).....:		N/A
	c) Air gap (mm) .....:		N/A
5.3.2.4	Terminals for connecting stripped wire		N/A
5.4	Insulation materials and requirements		P
5.4.1.2	Properties of insulating material		P
5.4.1.3	Humidity conditioning.....:		P
5.4.1.4	Maximum operating temperature for insulating materials .....:		N/A
5.4.1.5	Pollution degree.....:		—
5.4.1.5.2	Test for pollution degree 1 environment and for an insulating compound		N/A
5.4.1.5.3	Thermal cycling		N/A
5.4.1.6	Insulation in transformers with varying dimensions		N/A
5.4.1.7	Insulation in circuits generating starting pulses		N/A
5.4.1.8	Determination of working voltage		P
5.4.1.9	Insulating surfaces		P
5.4.1.10	Thermoplastic parts on which conductive metallic parts are directly mounted		P
5.4.1.10.2	Vicat softening temperature .....:		N/A
5.4.1.10.3	Ball pressure .....:		P

EN 62368-1			
Clause	Requirement + Test	Result - Remark	Verdic
5.4.2	Clearances		P
5.4.2.2	Determining clearance using peak working voltage		P
5.4.2.3	Determining clearance using required withstand voltage .....:		N/A
	a) a.c. mains transient voltage.....:		—
	b) d.c. mains transient voltage .....:		—
	c) external circuit transient voltage .....:		—
	d) transient voltage determined by measurement :		—
5.4.2.4	Determining the adequacy of a clearance using an electric strength test		N/A
5.4.2.5	Multiplication factors for clearances and test voltages.....:		N/A
5.4.3	Creepage distances .....:		P
5.4.3.1	General		P
5.4.3.3	Material Group .....:		—
5.4.4	Solid insulation		P
5.4.4.2	Minimum distance through insulation .....:		P
5.4.4.3	Insulation compound forming solid insulation		N/A
5.4.4.4	Solid insulation in semiconductor devices		N/A
5.4.4.5	Cemented joints		N/A
5.4.4.6	Thin sheet material		P
5.4.4.6.1	General requirements		P
5.4.4.6.2	Separable thin sheet material		P
	Number of layers (pcs) .....:		P
5.4.4.6.3	Non-separable thin sheet material		N/A
5.4.4.6.4	Standard test procedure for non-separable thin sheet material .....:		N/A
5.4.4.6.5	Mandrel test		N/A
5.4.4.7	Solid insulation in wound components		N/A
5.4.4.9	Solid insulation at frequencies >30 kHz.....:		N/A
5.4.5	Antenna terminal insulation		N/A
5.4.5.1	General		N/A
5.4.5.2	Voltage surge test		N/A
	Insulation resistance (MΩ).....:		—
5.4.6	Insulation of internal wire as part of supplementary safeguard.....:		N/A

EN 62368-1			
Clause	Requirement + Test	Result - Remark	Verdic
5.4.7	Tests for semiconductor components and for cemented joints		N/A
5.4.8	Humidity conditioning	No test required however applied by request of the client.	P
	Relative humidity (%) .....:		—
	Temperature (°C) .....:		—
	Duration (h) .....:		—
5.4.9	Electric strength test .....:		P
5.4.9.1	Test procedure for a solid insulation type test		P
5.4.9.2	Test procedure for routine tests		N/A
5.4.10	Protection against transient voltages between external circuit		N/A
5.4.10.1	Parts and circuits separated from external circuits		N/A
5.4.10.2	Test methods		N/A
5.4.10.2.1	General		N/A
5.4.10.2.2	Impulse test.....:		N/A
5.4.10.2.3	Steady-state test .....:		N/A
5.4.11	Insulation between external circuits and earthed circuitry.....:		N/A
5.4.11.1	Exceptions to separation between external circuits and earth		N/A
5.4.11.2	Requirements		N/A
	Rated operating voltage U_{op} (V) .....:		—
	Nominal voltage U_{peak} (V) .....:		—
	Max increase due to variation U_{sp} .....:		—
	Max increase due to ageing ΔU_{sa} .....:		—
	$U_{op} = U_{peak} + \Delta U_{sp} + \Delta U_{sa}$ .....:		—
5.5	Components as safeguards		
5.5.1	General		P
5.5.2	Capacitors and RC units		P
5.5.2.1	General requirement		P
5.5.2.2	Safeguards against capacitor discharge after disconnection of a connector .....:		N/A
5.5.3	Transformers		P
5.5.4	Optocouplers		N/A
5.5.5	Relays		N/A
5.5.6	Resistors		N/A

EN 62368-1			
Clause	Requirement + Test	Result - Remark	Verdic
5.5.7	SPD's		N/A
5.5.7.1	Use of an SPD connected to reliable earthing		N/A
5.5.7.2	Use of an SPD between mains and protective earth		N/A
5.5.8	Insulation between the mains and external circuit consisting of a coaxial cable .....:		N/A
5.6	Protective conductor		N/A
5.6.2	Requirement for protective conductors		N/A
5.6.2.1	General requirements		N/A
5.6.2.2	Colour of insulation		N/A
5.6.3	Requirement for protective earthing conductors		N/A
	Protective earthing conductor size (mm^2) ..... :		—
5.6.4	Requirement for protective bonding conductors		N/A
5.6.4.1	Protective bonding conductors		N/A
	Protective bonding conductor size (mm^2). ..... :		—
	Protective current rating (A) ..... :		—
5.6.4.3	Current limiting and overcurrent protective devices		N/A
5.6.5	Terminals for protective conductors		N/A
5.6.5.1	Requirement		N/A
	Conductor size (mm^2), nominal thread diameter (mm). ..... :		N/A
5.6.5.2	Corrosion		N/A
5.6.6	Resistance of the protective system		N/A
5.6.6.1	Requirements		N/A
5.6.6.2	Test Method Resistance (Ω) ..... :		N/A
5.6.7	Reliable earthing		N/A
5.7	Prospective touch voltage, touch current and protective conductor current		N/A
5.7.2	Measuring devices and networks		N/A
5.7.2.1	Measurement of touch current ..... :		P
5.7.2.2	Measurement of prospective touch voltage		P
5.7.3	Equipment set-up, supply connections and earth connections		N/A
	System of interconnected equipment (separate connections/single connection)..... :		—
	Multiple connections to mains (one connection at a time/simultaneous connections)..... :		—
5.7.4	Earthed conductive accessible parts ..... :		N/A

EN 62368-1			
Clause	Requirement + Test	Result - Remark	Verdic
5.7.5	Protective conductor current		N/A
	Supply Voltage (V) ..... :		—
	Measured current (mA) ..... :		—
	Instructional Safeguard ..... :		N/A
5.7.6	Prospective touch voltage and touch current due to external circuits		N/A
5.7.6.1	Touch current from coaxial cables		N/A
5.7.6.2	Prospective touch voltage and touch current from external circuits		N/A
5.7.7	Summation of touch currents from external circuits		N/A
	a) Equipment with earthed external circuits Measured current (mA) ..... :		N/A
	b) Equipment whose external circuits are not referenced to earth. Measured current (mA) ..... :		N/A

6	**ELECTRICALLY- CAUSED FIRE**		P
6.2	Classification of power sources (PS) and potential ignition sources (PIS)		P
6.2.2	Power source circuit classifications		P
6.2.2.1	General		P
6.2.2.2	Power measurement for worst-case load fault .....:	(See appended table 6.2.2)	P
6.2.2.3	Power measurement for worst-case power source fault .....:	(See appended table 6.2.2)	P
6.2.2.4	PS1 .....:	(See appended table 6.2.2)	P
6.2.2.5	PS2 .....:	(See appended table 6.2.2)	P
6.2.2.6	PS3 .....:		N/A
6.2.3	Classification of potential ignition sources		P
6.2.3.1	Arcing PIS .....:	No arcing PIS exists	N/A
6.2.3.2	Resistive PIS .....:	No identification of resistive PIS required due to providing fire enclosure and it complied with requirements of sub-clause 6.4.8	P
6.3	Safeguards against fire under normal operating and abnormal operating conditions		P
6.3.1 (a)	No ignition and attainable temperature value less than 90 % defined by ISO 871 or less than 300 °C for unknown materials .....:	(See appended table 5.4.1.5, 6.3.2, 9.0, B.2.6)	P
6.3.1 (b)	Combustible materials outside fire enclosure	V-0 enclosure and PCB used	P
6.4	Safeguards against fire under single fault conditions		P

EN 62368-1			
Clause	Requirement + Test	Result - Remark	Verdic
6.4.1	Safeguard Method	Control of fire spread	P
6.4.2	Reduction of the likelihood of ignition under single fault conditions in PS1 circuits	V-0 enclosure and PCB used	N/A
6.4.3	Reduction of the likelihood of ignition under single fault conditions in PS2 and PS3 circuits		N/A
6.4.3.1	General		N/A
6.4.3.2	Supplementary Safeguards		N/A
	Special conditions if conductors on printed boards are opened or peeled		N/A
6.4.3.3	Single Fault Conditions ..... :		N/A
	Special conditions for temperature limited by fuse		N/A
6.4.4	Control of fire spread in PS1 circuits		N/A
6.4.5	Control of fire spread in PS2 circuits		P
6.4.5.2	Supplementary safeguards .....:	(See appended tables 4.1.2)	P
6.4.6	Control of fire spread in PS3 circuit	No PS3 exist	N/A
6.4.7	Separation of combustible materials from a PIS	Fire enclosure used	N/A
6.4.7.1	General .....:		N/A
6.4.7.2	Separation by distance		N/A
6.4.7.3	Separation by a fire barrier		N/A
6.4.8	Fire enclosures and fire barriers	The fire enclosure is the overall enclosure	P
6.4.8.1	Fire enclosure and fire barrier material properties	V-0	P
6.4.8.2.1	Requirements for a fire barrier		N/A
6.4.8.2.2	Requirements for a fire enclosure		P
6.4.8.3	Constructional requirements for a fire enclosure and a fire barrier		P
6.4.8.3.1	Fire enclosure and fire barrier openings	No openings	N/A
6.4.8.3.2	Fire barrier dimensions		N/A
6.4.8.3.3	Top Openings in Fire Enclosure: dimensions (mm) .....:		N/A
	Needle Flame test		N/A
6.4.8.3.4	Bottom Openings in Fire Enclosure, condition met a), b) and/or c) dimensions (mm) .....:		N/A
	Flammability tests for the bottom of a fire enclosure .....:		N/A
6.4.8.3.5	Integrity of the fire enclosure, condition met: a), b) or c).....:		N/A
6.4.8.4	Separation of PIS from fire enclosure and fire barrier distance (mm) or flammability rating..... :	V-0	P

EN 62368-1			
Clause	Requirement + Test	Result - Remark	Verdic
6.5	Internal and external wiring		N/A
6.5.1	Requirements		N/A
6.5.2	Cross-sectional area (mm^2) .....:		—
6.5.3	Requirements for interconnection to building wiring.....:	No such wiring	N/A
6.6	Safeguards against fire due to connection to additional equipment	The external DC source is assumed to be PS1	N/A
	External port limited to PS2 or complies with Clause Q.1		N/A

7	**INJURY CAUSED BY HAZARDOUS SUBSTANCES**		N/A
7.2	Reduction of exposure to hazardous substances		N/A
7.3	Ozone exposure	No ozone produced.	N/A
7.4	Use of personal safeguards (PPE)		N/A
	Personal safeguards and instructions.....:		—
7.5	Use of instructional safeguards and instructions		N/A
	Instructional safeguard (ISO 7010) .....:		—
7.6	Batteries..... :	(See Annex M)	N/A

8	**MECHANICALLY-CAUSED INJURY**		P
8.1	General	Enclosure is smooth and no mechanical energy sources	P
8.2	Mechanical energy source classifications	MS1	P
8.3	Safeguards against mechanical energy sources	No additional safeguards is needed to against mechanical energy sources	N/A
8.4	Safeguards against parts with sharp edges and corners	No sharp edges and corners.	N/A
8.4.1	Safeguards		N/A
8.5	Safeguards against moving parts	No moving parts within EUT	N/A
8.5.1	MS2 or MS3 part required to be accessible for the function of the equipment		N/A
8.5.2	Instructional Safeguard ..... :		—
8.5.4	Special categories of equipment comprising moving parts		N/A
8.5.4.1	Large data storage equipment		N/A

EN 62368-1			
Clause	Requirement + Test	Result - Remark	Verdic
8.5.4.2	Equipment having electromechanical device for destruction of media		N/A
8.5.4.2.1	Safeguards and Safety Interlocks..... :		N/A
8.5.4.2.2	Instructional safeguards against moving parts		N/A
	Instructional Safeguard ..... :		—
8.5.4.2.3	Disconnection from the supply		N/A
8.5.4.2.4	Probe type and force (N)..... :		N/A
8.5.5	High Pressure Lamps		N/A
8.5.5.1	Energy Source Classification		N/A
8.5.5.2	High Pressure Lamp Explosion Test ..... :		N/A
8.6	Stability	No stability requirements for MS1	N/A
8.6.1	Product classification		N/A
	Instructional Safeguard ..... :		—
8.6.2	Static stability		N/A
8.6.2.2	Static stability test		N/A
	Applied Force .....:		—
8.6.2.3	Downward Force Test		N/A
8.6.3	Relocation stability test		N/A
	Unit configuration during 10° tilt.....:		—
8.6.4	Glass slide test		N/A
8.6.5	Horizontal force test (Applied Force) .....:		N/A
	Position of feet or movable parts .....:		—
8.7	Equipment mounted to wall or ceiling		N/A
8.7.1	Mounting Means (Length of screws (mm) and mounting surface) .....:		N/A
8.7.2	Direction and applied force .....:		N/A
8.8	Handles strength	No handle	N/A
8.8.1	Classification		N/A
8.8.2	Applied Force .....:		N/A
8.9	Wheels or casters attachment requirements	No wheels within EUT	N/A
8.9.1	Classification		N/A
8.9.2	Applied force.....:		—
8.10	Carts, stands and similar carriers	Not such devices	N/A
8.10.1	General		N/A
8.10.2	Marking and instructions		N/A

EN 62368-1			
Clause	Requirement + Test	Result - Remark	Verdic
	Instructional Safeguard .....:		—
8.10.3	Cart, stand or carrier loading test and compliance		N/A
	Applied force.....:		—
8.10.4	Cart, stand or carrier impact test		N/A
8.10.5	Mechanical stability		N/A
	Applied horizontal force (N) .....:		—
8.10.6	Thermoplastic temperature stability (°C) .....:		N/A
8.11	Mounting means for rack mounted equipment	Not such apparatus	N/A
8.11.1	General		N/A
8.11.2	Product Classification		N/A
8.11.3	Mechanical strength test, variable *N* ..... :		N/A
8.11.4	Mechanical strength test 250N, including end stops		N/A
8.12	Telescoping or rod antennas	No antennas	N/A
	Button/Ball diameter (mm)..... :		—

9	**THERMAL BURN INJURY**		P
9.2	Thermal energy source classifications	Classified as TS1	P
9.3	Safeguard against thermal energy sources		P
9.4	Requirements for safeguards		N/A
9.4.1	Equipment safeguard	Not required due to TS1	N/A
9.4.2	Instructional safeguard .....:		N/A

10	**RADIATION**		N/A
10.2	Radiation energy source classification	No such radiation energy source	N/A
10.2.1	General classification		N/A
10.3	Protection against laser radiation		N/A
	Laser radiation that exists equipment:		—
	Normal, abnormal, single-fault .....:		N/A
	Instructional safeguard.....:		—
	Tool .....:		—
10.4	Protection against visible, infrared, and UV radiation		N/A
10.4.1	General		N/A
10.4.1.a)	RS3 for Ordinary and instructed persons..... :		N/A
10.4.1.b)	RS3 accessible to a skilled person ..... :		N/A

EN 62368-1			
Clause	Requirement + Test	Result - Remark	Verdic
	Personal safeguard (PPE) instructional safeguard ..... :		—
10.4.1.c)	Equipment visible, IR, UV does not exceed RS1 . :		N/A
10.4.1.d)	Normal, abnormal, single-fault conditions .....:		N/A
10.4.1.e)	Enclosure material employed as safeguard is opaque ..... :		N/A
10.4.1.f)	UV attenuation ..... :		N/A
10.4.1.g)	Materials resistant to degradation UV..... :		N/A
10.4.1.h)	Enclosure containment of optical radiation ..... :		N/A
10.4.1.i)	Exempt Group under normal operating conditions ..... :		N/A
10.4.2	Instructional safeguard..... :		N/A
10.5	Protection against x-radiation		N/A
10.5.1	X- radiation energy source that exists equipment .....:		N/A
	Normal, abnormal, single fault conditions		N/A
	Equipment safeguards ..... :		N/A
	Instructional safeguard for skilled person ..... :		N/A
10.5.3	Most unfavourable supply voltage to give maximum radiation ..... :		—
	Abnormal and single-fault condition.....:		N/A
	Maximum radiation (pA/kg) .....:		N/A
10.6	Protection against acoustic energy sources		N/A
10.6.1	General		N/A
10.6.2	Classification		N/A
	Acoustic output, dB(A) .....:		N/A
	Output voltage, unweighted r.m.s. .....:		N/A
10.6.4	Protection of persons		N/A
	Instructional safeguards.....:		N/A
	Equipment safeguard prevent ordinary person to RS2 .....:		—
	Means to actively inform user of increase sound pressure .....:		—
	Equipment safeguard prevent ordinary person to RS2..... :		—
10.6.5	Requirements for listening devices (headphones, earphones, etc.)		N/A
10.6.5.1	Corded passive listening devices with analog input		N/A

EN 62368-1			
Clause	Requirement + Test	Result - Remark	Verdic
	Input voltage with 94 dB(A) L_{Aeq} acoustic pressure output .....:		—
10.6.5.2	Corded listening devices with digital input		N/A
	Maximum dB(A).....:		—
10.6.5.3	Cordless listening device		N/A
	Maximum dB(A).....:		—

B	**NORMAL OPERATING CONDITION TESTS, ABNORMAL OPERATING CONDITION TESTS AND SINGLE FAULT CONDITION TESTS**		P
B.2	Normal Operating Conditions		P
B.2.1	General requirements.....:	(See Test Item Particulars and appended test tables)	P
	Audio Amplifiers and equipment with audio amplifiers.....:	(See Annex E)	N/A
B.2.3	Supply voltage and tolerances	±10%	P
B.2.5	Input test.....:	(See appended table B.2.5)	N/A
B.3	Simulated abnormal operating conditions		P
B.3.1	General requirements.....:	(See appended table B.3)	P
B.3.2	Covering of ventilation openings	No openings within the EUT	N/A
B.3.3	D.C. mains polarity test		N/A
B.3.4	Setting of voltage selector.....:	No such selector	N/A
B.3.5	Maximum load at output terminals.....:	No such terminals used	P
B.3.6	Reverse battery polarity	Can't replaceable by ordinary person	N/A
B.3.7	Abnormal operating conditions as specified in Clause E.2.		P
B.3.8	Safeguards functional during and after abnormal operating conditions		P
B.4	Simulated single fault conditions		N/A
B.4.2	Temperature controlling device open or short-circuited.....:	No such controlling device	N/A
B.4.3	Motor tests	No motor used	N/A
B.4.3.1	Motor blocked or rotor locked increasing the internal ambient temperature .....:		N/A
B.4.4	Short circuit of functional insulation		N/A
B.4.4.1	Short circuit of clearances for functional insulation		N/A
B.4.4.2	Short circuit of creepage distances for functional insulation		N/A
B.4.4.3	Short circuit of functional insulation on coated printed boards		N/A
B.4.5	Short circuit and interruption of electrodes in tubes and semiconductors		N/A
B.4.6	Short circuit or disconnect of passive components		N/A
B.4.7	Continuous operation of components		N/A
B.4.8	Class 1 and Class 2 energy sources within limits during and after single fault conditions		N/A
B.4.9	Battery charging under single fault conditions ...:	(See Annex M)	N/A

C	**UV RADIATION**		N/A
C.1	Protection of materials in equipment from UV radiation	General indoor used equipment only	N/A
C.1.2	Requirements		N/A
C.1.3	Test method		N/A
C.2	UV light conditioning test		N/A
C.2.1	Test apparatus		N/A
C.2.2	Mounting of test samples		N/A
C.2.3	Carbon-arc light-exposure apparatus		N/A
C.2.4	Xenon-arc light exposure apparatus		N/A
D	**TEST GENERATORS**		N/A
D.1	Impulse test generators	Not such apparatus	N/A
D.2	Antenna interface test generator		N/A
D.3	Electronic pulse generator		N/A
E	**TEST CONDITIONS FOR EQUIPMENT CONTAINING AUDIO AMPLIFIERS**		N/A
E.1	Audio amplifier normal operating conditions		N/A
	Audio signal voltage (V) .....:		—
	Rated load impedance (Ω) .....:		—
E.2	Audio amplifier abnormal operating conditions		N/A
F	**EQUIPMENT MARKINGS, INSTRUCTIONS, AND INSTRUCTIONAL SAFEGUARDS**		P
F.1	General requirements		P
	Instructions – Language .....:	English	—
F.2	Letter symbols and graphical symbols		P
F.2.1	Letter symbols according to IEC60027-1		P
F.2.2	Graphic symbols IEC, ISO or manufacturer specific		P
F.3	Equipment markings		P
F.3.1	Equipment marking locations	On the rear enclosure	P
F.3.2	Equipment identification markings		P
F.3.2.1	Manufacturer identification .....:	See page 3 for details	—
F.3.2.2	Model identification .....:	See page 3 for details	—
F.3.3	Equipment rating markings	See page 3 for details	P
F.3.3.1	Equipment with direct connection to mains		N/A
F.3.3.2	Equipment without direct connection to mains		N
F.3.3.3	Nature of supply voltage.....:	See page 3 for details	—
F.3.3.4	Rated voltage .....:	See page 3 for details	—
F.3.3.4	Rated frequency .....:		—

F.3.3.6	Rated current or rated power .....:	See page 3 for details	—
F.3.3.7	Equipment with multiple supply connections	No multiple supply connection	N/A
F.3.4	Voltage setting device	No such device	N/A
F.3.5	Terminals and operating devices		N/A
F.3.5.1	Mains appliance outlet and socket-outlet markings .....:		N/A
F.3.5.2	Switch position identification marking .....:		N/A
F.3.5.3	Replacement fuse identification and rating markings.....:		N/A
F.3.5.4	Replacement battery identification marking .....:		N/A
F.3.5.5	Terminal marking location		N/A
F.3.6	Equipment markings related to equipment classification		P
F.3.6.1	Class I Equipment		N/A
F.3.6.1.1	Protective earthing conductor terminal		N/A
F.3.6.1.2	Neutral conductor terminal		N/A
F.3.6.1.3	Protective bonding conductor terminals		N/A
F.3.6.2	Class II equipment (IEC60417-5172)		P
F.3.6.2.1	Class II equipment with or without functional earth		N/A
F.3.6.2.2	Class II equipment with functional earth terminal marking		N/A
F.3.7	Equipment IP rating marking .....:	IPX0 equipment	—
F.3.8	External power supply output marking	No such power supplied provided	N/A
F.3.9	Durability, legibility and permanence of marking		P
F.3.10	Test for permanence of markings	After test there was no damage on the label. The marking on the label did not fade. There was no curling and lifting of the label edge.	P
F.4	Instructions		N/A
	a) Equipment for use in locations where children not likely to be present - marking		N/A
	b) Instructions given for installation or initial use		N/A
	c) Equipment intended to be fastened in place		N/A
	d) Equipment intended for use only in restricted access area		N/A
	e) Audio equipment terminals classified as ES3 and other equipment with terminals marked in accordance F.3.6.1		N/A
	f) Protective earthing employed as safeguard		N/A

	g) Protective earthing conductor current exceeding ES 2 limits		N/A
	h) Symbols used on equipment		N/A
	i) Permanently connected equipment not provided with all-pole mains switch		N/A
j)	j) Replaceable components or modules providing safeguard function		N/A
F.5	Instructional safeguards		N/A
	Where “instructional safeguard” is referenced in the test report it specifies the required elements, location of marking and/or instruction		N/A
G	**COMPONENTS**		N/A
G.1	**Switches**		N/A
G.1.1	General requirements	No such device used	N/A
G.1.2	Ratings, endurance, spacing, maximum load		N/A
G.2	**Relays**		N/A
G.2.1	General requirements	No such device used	N/A
G.2.2	Overload test		N/A
G.2.3	Relay controlling connectors supply power		N/A
G.2.4	Mains relay, modified as stated in G.2		N/A
G.3	**Protection Devices**		N/A
G.3.1	Thermal cut-offs	No such device used	N/A
G.3.1.1a) &b)	Thermal cut-outs separately approved according to IEC 60730 with conditions indicated in a) & b)		N/A
G.3.1.1c)	Thermal cut-outs tested as part of the equipment as indicated in c)		N/A
G.3.1.2	Thermal cut-off connections maintained and secure		N/A
G.3.2	Thermal links		N/A
G.3.2.1a)	Thermal links separately tested with IEC 60691	No such device used	N/A
G.3.2.1b)	Thermal links tested as part of the equipment		N/A
	Aging hours (H) .....:		—
	Single Fault Condition .....:		—
	Test Voltage (V) and Insulation Resistance (Ω).:		—
G.3.3	PTC Thermistors	No such device used	N/A
G.3.4	Overcurrent protection devices		N/A
G.3.5	Safeguards components not mentioned in G.3.1 to G.3.5		N/A
G.3.5.1	Non-resettable devices suitably rated and marking provided		N/A
G.3.5.2	Single faults conditions .....:	(See appended Table B.4)	N/A

G.4	**Connectors**		N/A
G.4.1	Spacings	No such device used	N/A
G.4.2	Mains connector configuration .....:		N/A
G.4.3	Plug is shaped that insertion into mains socket-outlets or appliance coupler is unlikely		N/A
G.5	**Wound Components**		N/A
G.5.1	Wire insulation in wound components.....	No such device used	N/A
G.5.1.2 a)	Two wires in contact inside wound component, angle between 45° and 90°		N/A
G.5.1.2 b)	Construction subject to routine testing		N/A
G.5.2	Endurance test on wound components		N/A
G.5.2.1	General test requirements		N/A
G.5.2.2	Heat run test		N/A
	Time (s) .....:		—
	Temperature (°C) .....:		—
G.5.2.3	Wound Components supplied by mains		N/A
G.5.3	**Transformers**		P
G.5.3.1	Requirements applied (IEC61204-7, IEC61558-1/-2, and/or IEC62368-1).....:		P
	Position.....:		—
	Method of protection .....:		—
G.5.3.2	Insulation		P
	Protection from displacement of windings .....:		—
G.5.3.3	Overload test.....:		P
G.5.3.3.1	Test conditions		P
G.5.3.3.2	Winding Temperatures testing in the unit		N/A
G.5.3.3.3	Winding Temperatures - Alternative test method		N/A
G.5.4	**Motors**		N/A
G.5.4.1	General requirements	No such device used	N/A
	Position .....:		—
G.5.4.2	Test conditions		N/A
G.5.4.3	Running overload test		N/A
G.5.4.4	Locked-rotor overload test		N/A
	Test duration (days) .....:		—
G.5.4.5	Running overload test for d.c. motors in secondary circuits		N/A
G.5.4.5.2	Tested in the unit		N/A
	Electric strength test (V).....:		—

G.5.4.5.3	Tested on the Bench - Alternative test method; test time (h) .....:		N/A
	Electric strength test (V) .....:		—
G.5.4.6	Locked-rotor overload test for d.c. motors in secondary circuits		N/A
G.5.4.6.2	Tested in the unit		N/A
	Maximum Temperature .....:		N/A
	Electric strength test (V) .....:		N/A
G.5.4.6.3	Tested on the bench - Alternative test method; test time (h) .....:		N/A
	Electric strength test (V) .....:		N/A
G.5.4.7	Motors with capacitors		N/A
G.5.4.8	Three-phase motors		N/A
G.5.4.9	Series motors		N/A
	Operating voltage .....:		—
G.6	**Wire Insulation**		N/A
G.6.1	General	No peak working voltage exceeded ES2	N/A
G.6.2	Solvent-based enamel wiring insulation		N/A
G.7	**Mains supply cords**		N/A
G.7.1	General requirements	No mains supply cords used	N/A
	Type .....:		—
	Rated current (A).....:		—
	Cross-sectional area (mm^2), (AWG).....:		—
G.7.2	Compliance and test method		N/A
G.7.3	Cord anchorages and strain relief for non-detachable power supply cords		N/A
G.7.3.2	Cord strain relief		N/A
G.7.3.2.1	Requirements		N/A
	Strain relief test force (N) .....:		—
G.7.3.2.2	Strain relief mechanism failure		N/A
G.7.3.2.3	Cord sheath or jacket position, distance (mm) ...:		—
G.7.3.2.4	Strain relief comprised of polymeric material		N/A
G.7.4	Cord Entry .....:		N/A
G.7.5	Non-detachable cord bend protection		N/A
G.7.5.1	Requirements		N/A
G.7.5.2	Mass (g) .....:		—
	Diameter (m).....:		—
	Temperature (°C) .....:		—

G.7.6	Supply wiring space		N/A
G.7.6.2	Stranded wire		N/A
G.7.6.2.1	Test with 8 mm strand		N/A
G.8	**Varistors**		N/A
G.8.1	General requirements	No such components used	N/A
G.8.2	Safeguard against shock		N/A
G.8.3	Safeguard against fire		N/A
G.8.3.2	Varistor overload test .....:		N/A
G.8.3.3	Temporary overvoltage .....:		N/A
G.9	**Integrated Circuit (IC) Current Limiters**		N/A
G.9.1 a)	Manufacturer defines limit at max. 5A.	No such components used	N/A
G.9.1 b)	Limiters do not have manual operator or reset		N/A
G.9.1 c)	Supply source does not exceed 250 VA .....:		—
G.9.1 d)	IC limiter output current (max. 5A).....:		—
G.9.1 e)	Manufacturers' defined drift .....:		—
G.9.2	Test Program 1		N/A
G.9.3	Test Program 2		N/A
G.9.4	Test Program 3		N/A
G.10	**Resistors**		N/A
G.10.1	General requirements	No such components used	N/A
G.10.2	Resistor test		N/A
G.10.3	Test for resistors serving as safeguards between the mains and an external circuit consisting of a coaxial cable		N/A
G.10.3.1	General requirements		N/A
G.10.3.2	Voltage surge test		N/A
G.10.3.3	Impulse test		N/A
G.11	**Capacitor and RC units**		P
G.11.1	General requirements		P
G.11.2	Conditioning of capacitors and RC units		P
G.11.3	Rules for selecting capacitors		P
G.12	**Optocouplers**		N/A
	Optocouplers comply with IEC 60747-5-5:2007 Spacing or Electric Strength Test (specify option and test results).....:	No such components used	N/A
	Type test voltage Vini .....:		—
	Routine test voltage, Vini,b .....:		—
G.13	**Printed boards**		P

G.13.1	General requirements		P
G.13.2	Uncoated printed boards		P
G.13.3	Coated printed boards		N/A
G.13.4	Insulation between conductors on the same inner surface		N/A
	Compliance with cemented joint requirements (Specify construction).....:		—
G.13.5	Insulation between conductors on different surfaces		N/A
	Distance through insulation.....:		N/A
	Number of insulation layers (pcs) .....:		—
G.13.6	Tests on coated printed boards		N/A
G.13.6.1	Sample preparation and preliminary inspection		N/A
G.13.6.2a)	Thermal conditioning		N/A
G.13.6.2b)	Electric strength test		N/A
G.13.6.2c)	Abrasion resistance test		N/A
G.14	**Coating on components terminals**		N/A
G.14.1	Requirements .....:		N/A
G.15	**Liquid filled components**		N/A
G.15.1	General requirements	No such components used	N/A
G.15.2	Requirements		N/A
G.15.3	Compliance and test methods		N/A
G.15.3.1	Hydrostatic pressure test		N/A
G.15.3.2	Creep resistance test		N/A
G.15.3.3	Tubing and fittings compatibility test		N/A
G.15.3.4	Vibration test		N/A
G.15.3.5	Thermal cycling test		N/A
G.15.3.6	Force test		N/A
G.15.4	Compliance		N/A
G.16	**IC including capacitor discharge function (ICX)**		N/A
a)	Humidity treatment in accordance with sc5.4.8 – 120 hours	No such components used	N/A
b)	Impulse test using circuit 2 with Uc = to transient voltage .....:		N/A
C1)	Application of ac voltage at 110% of rated voltage for 2.5 minutes		N/A
C2)	Test voltage .....:		—
D1)	10,000 cycles on and off using capacitor with smallest capacitance resistor with largest resistance specified by manufacturer		N/A

D2)	Capacitance .....:		—
D3)	Resistance .....:		—
H	**CRITERIA FOR TELEPHONE RINGING SIGNALS**		N/A
H.1	General	Not such apparatus	N/A
H.2	Method A		N/A
H.3	Method B		N/A
H.3.1	Ringing signal		N/A
H.3.1.1	Frequency (Hz) .....:		—
H.3.1.2	Voltage (V) .....:		—
H.3.1.3	Cadence; time (s) and voltage (V) .....:		—
H.3.1.4	Single fault current (mA):.....:		—
H.3.2	Tripping device and monitoring voltage .....:		N/A
H.3.2.1	Conditions for use of a tripping device or a monitoring voltage complied with		N/A
H.3.2.2	Tripping device		N/A
H.3.2.3	Monitoring voltage (V) .....:		—
J	**INSULATED WINDING WIRES FOR USE WITHOUT INTERLEAVED INSULATION**		N/A
	General requirements	No such winding wire used	N/A
K	**SAFETY INTERLOCKS**		N/A
K.1	General requirements	No safety interlocks in the EUT	N/A
K.2	Components of safety interlock safeguard mechanism		N/A
K.3	Inadvertent change of operating mode		N/A
K.4	Interlock safeguard override		N/A
K.5	Fail-safe		N/A
	Compliance .....:		N/A
K.6	Mechanically operated safety interlocks		N/A
K.6.1	Endurance requirement		N/A
K.6.2	Compliance and Test method .....:		N/A
K.7	Interlock circuit isolation		N/A
K.7.1	Separation distance for contact gaps & interlock circuit elements (type and circuit location) .....:		N/A
K.7.2	Overload test, Current (A) .....:		N/A
K.7.3	Endurance test		N/A
K.7.4	Electric strength test .....:		N/A
L	**DISCONNECT DEVICES**		P
L.1	General requirements		P

L.2	Permanently connected equipment		N/A
L.3	Parts that remain energized		N/A
L.4	Single phase equipment		P
L.5	Three-phase equipment		N/A
L.6	Switches as disconnect devices		N/A
L.7	Plugs as disconnect devices		P
L.8	Multiple power sources		N/A
M	**EQUIPMENT CONTAINING BATTERIES AND THEIR PROTECTION CIRCUITS**		N/A
M.1	General requirements		N/A
M.2	Safety of batteries and their cells		N/A
M.2.1	Requirements		N/A
M.2.2	Compliance and test method (identify method).. :		N/A
M.3	Protection circuits		N/A
M.3.1	Requirements		N/A
M.3.2	Tests		N/A
	- Overcharging of a rechargeable battery	(See append table Annex M)	N/A
	- Unintentional charging of a non-rechargeable battery	No such battery used	N/A
	- Reverse charging of a rechargeable battery		N/A
	- Excessive discharging rate for any battery	(See append table Annex M)	N/A
M.3.3	Compliance .....:	(See append table Annex M)	N/A
M.4	Additional safeguards for equipment containing secondary lithium battery		N/A
M.4.1	General		N/A
M.4.2	Charging safeguards		N/A
M.4.2.1	Charging operating limits		N/A
M.4.2.2a)	Charging voltage, current and temperature .....:	(See append table Annex M.4)	—
M.4.2.2 b)	Single faults in charging circuitry .....:	(See Annex B.4 and append table Annex M.4)	—
M.4.3	Fire Enclosure	V-0 enclosure & PCB used	N/A
M.4.4	Endurance of equipment containing a secondary lithium battery		N/A
M.4.4.2	Preparation		N/A
M.4.4.3	Drop and charge/discharge function tests		N/A
	Drop		N/A
	Charge		N/A

	Discharge		N/A
M.4.4.4	Charge-discharge cycle test		N/A
M.4.4.5	Result of charge-discharge cycle test		N/A
M.5	Risk of burn due to short circuit during carrying		N/A
M.5.1	Requirement		N/A
M.5.2	Compliance and Test Method (Test of P.2.3)		N/A
M.6	Prevention of short circuits and protection from other effects of electric current		N/A
M.6.1	Short circuits		N/A
M.6.1.1	General requirements		N/A
M.6.1.2	Test method to simulate an internal fault		N/A
M.6.1.3	Compliance (Specify M.6.1.2 or alternative method) ..... :		N/A
M.6.2	Leakage current (mA) ..... :		N/A
M.7	Risk of explosion from lead acid and NiCd batteries	No such battery used	N/A
M.7.1	Ventilation preventing explosive gas concentration		N/A
M.7.2	Compliance and test method		N/A
M.8	Protection against internal ignition from external spark sources of lead acid batteries	No such battery used	N/A
M.8.1	General requirements		N/A
M.8.2	Test method		N/A
M.8.2.1	General requirements		N/A
M.8.2.2	Estimation of hypothetical volume *Vz* (m^3/s) ..... :		—
M.8.2.3	Correction factors..... :		—
M.8.2.4	Calculation of distance *d* (mm) ..... :		—
M.9	Preventing electrolyte spillage	No such battery used	N/A
M.9.1	Protection from electrolyte spillage		N/A
M.9.2	Tray for preventing electrolyte spillage		N/A
M.10	Instructions to prevent reasonably foreseeable misuse (Determination of compliance: inspection, data review; or abnormal testing) ..... :		N/A
N	**ELECTROCHEMICAL POTENTIALS**		
	Metal(s) used ..... :	Pollution degree considered	—
O	**MEASUREMENT OF CREEPAGE DISTANCES AND CLEARANCES**		P
	Figures O.1 to O.20 of this Annex applied ..... :		—
P	**SAFEGUARDS AGAINST ENTRY OF FOREIGN OBJECTS AND SPILLAGE OF INTERNAL LIQUIDS**		N/A
P.1	General requirements		N/A

P.2.2	Safeguards against entry of foreign object		N/A
	Location and Dimensions (mm) ..... :		—
P.2.3	Safeguard against the consequences of entry of foreign object		N/A
P.2.3.1	Safeguards against the entry of a foreign object		N/A
	Openings in transportable equipment		N/A
	Transportable equipment with metalized plastic parts ..... :		N/A
P.2.3.2	Openings in transportable equipment in relation to metallized parts of a barrier or enclosure (identification of supplementary safeguard) ..... :		N/A
P.3	Safeguards against spillage of internal liquids		N/A
P.3.1	General requirements		N/A
P.3.2	Determination of spillage consequences		N/A
P.3.3	Spillage safeguards		N/A
P.3.4	Safeguards effectiveness		N/A
P.4	Metallized coatings and adhesive securing parts		N/A
P.4.2 a)	Conditioning testing		N/A
	Tc (°C)..... :		—
	Tr (°C) ..... :		—
	Ta (°C)..... :		—
P.4.2 b)	Abrasion testing ..... :		N/A
P.4.2 c)	Mechanical strength testing ..... :		N/A
Q	**CIRCUITS INTENDED FOR INTERCONNECTION WITH BUILDING WIRING**		N/A
Q.1	Limited power sources		N/A
Q.1.1 a)	Inherently limited output		N/A
Q.1.1 b)	Impedance limited output		N/A
	- Regulating network limited output under normal operating and simulated single fault condition		N/A
Q.1.1 c)	Overcurrent protective device limited output		N/A
Q.1.1 d)	IC current limiter complying with G.9		N/A
Q.1.2	Compliance and test method		N/A
Q.2	Test for external circuits – paired conductor cable		N/A
	Maximum output current (A) ..... :		—
	Current limiting method ..... :		—
R	**LIMITED SHORT CIRCUIT TEST**		N/A
R.1	General requirements		N/A
R.2	Determination of the overcurrent protective device and circuit		N/A

R.3	Test method Supply voltage (V) and short-circuit current (A).. ..... :		N/A
S	**TESTS FOR RESISTANCE TO HEAT AND FIRE**		N/A
S.1	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples, material..... :		—
	Wall thickness (mm)..... :		—
	Conditioning (°C)..... :		—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	- Material not consumed completely		N/A
	- Material extinguishes within 30s		N/A
	- No burning of layer or wrapping tissue		N/A
S.2	Flammability test for fire enclosure and fire barrier integrity		N/A
	Samples, material..... :		—
	Wall thickness (mm)..... :		—
	Conditioning (°C)..... :		—
	Test flame according to IEC 60695-11-5 with conditions as set out		N/A
	Test specimen does not show any additional hole		N/A
S.3	Flammability test for the bottom of a fire enclosure		N/A
	Samples, material..... :		—
	Wall thickness (mm)..... :		—
	Cheesecloth did not ignite		N/A
S.4	Flammability classification of materials		N/A
S.5	Flammability test for fire enclosures and fire barrier materials of equipment where the steady state power does not exceed 4 000 W		N/A
	Samples, material..... :		—
	Wall thickness (mm)..... :		—
	Conditioning (test condition), (°C)..... :		—
	Test flame according to IEC 60695-11-20 with conditions as set out		N/A
	After every test specimen was not consumed completely		N/A
	After fifth flame application, flame extinguished within 1 min		N/A
T	**MECHANICAL STRENGTH TESTS**		**P**
T.1	General requirements		P

T.2	Steady force test, 10 N .....:		P
T.3	Steady force test, 30 N .....:		N/A
T.4	Steady force test, 100 N .....:		P
T.5	Steady force test, 250 N .....:		N/A
T.6	Enclosure impact test		N/A
	Fall test		N/A
	Swing test		N/A
T.7	Drop test .....:	(See appended table T7)	P
T.8	Stress relief test .....:	(See appended table T8)	P
T.9	Impact Test (glass)		N/A
T.9.1	General requirements		N/A
T.9.2	Impact test and compliance		N/A
	Impact energy (J).....:		—
	Height (m) .....:		—
T.10	Glass fragmentation test.....:		N/A
T.11	Test for telescoping or rod antennas		N/A
	Torque value (Nm) .....:		—
U	**MECHANICAL STRENGTH OF CATHODE RAY TUBES (CRT) AND PROTECTION AGAINST THE EFECTS OF IMPLOSION**		N/A
U.1	General requirements		N/A
U.2	Compliance and test method for non-intrinsically protected CRTs		N/A
U.3	Protective Screen.....:		N/A
V	**DETERMINATION OF ACCESSIBLE PARTS (FINGERS, PROBES AND WEDGES)**		P
V.1	Accessible parts of equipment		P
V.2	Accessible part criterion		P

4.1.2	TABLE: List of critical components	P

Object / part No.	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity[1]
22F1.0 flame retardant substrate	Interchangeable	EE19	----	----	----
ABS+PC flame-retardant environmental protection material	Interchangeable	CSC7203	----	----	----
Fuse	Interchangeable	MB10F	3R3 2/1 wire wound resistor	----	----
Schottky diodes	Interchangeable	400V6.8uf	SR 3100 50 core	----	----
transformer	Interchangeable	Interchangeable	EE-19-1688	----	----
Enameled wire	Interchangeable	Interchangeable	1715 core	----	----
Aluminum electrolytic capacitors	Interchangeable	Interchangeable	400V4.7uF	----	----
Aluminum electrolytic capacitors	Interchangeable	Interchangeable	50V4.7uF	----	----
Aluminum electrolytic capacitors	Interchangeable	Interchangeable	16V680uF	----	----
FR107 diode	Interchangeable	Interchangeable		----	----
Y capacitor	Interchangeable	Interchangeable	222/250V	----	----
LED indicator	Interchangeable	5MM blue light	----	----	----
Tren	Interchangeable	Interchangeable	----	----	----
High-voltage chip capacitors	Interchangeable	1M	----	----	----
High-voltage chip capacitors	Interchangeable	J-1M	----	----	----
High-voltage chip capacitors	Interchangeable	F-0.82R	----	----	----
High-voltage chip capacitors	Interchangeable	F-15K	----	----	----
High-voltage chip capacitors	Interchangeable	F-2.4K	----	----	----
High-voltage chip capacitors	Interchangeable	J-100K	----	----	----
High-voltage chip capacitors	Interchangeable	J-2.2K	----	----	--------
Chip IC	Interchangeable	CSC7131D	----	----	----

bridge	Interchangeable	MB10F 46 core	----	----	----
Power Plate	Interchangeable	Interchangeable	----	----	----
Power shell	Interchangeable	Interchangeable	----	----	----
Supplementary information:					

4.8.4, 4.8.5	**TABLE: Lithium coin/button cell batteries mechanical tests**	N/A

(The following mechanical tests are conducted in the sequence noted.)

4.8.4.2	**TABLE: Stress Relief test**	—

Part	**Material**	**Oven Temperature (°C)**	**Comments**
--	--	--	--

4.8.4.3	**TABLE: Battery replacement test**	—

Battery part no.	--	—

Battery Installation/withdrawal	Battery Installation/Removal Cycle	Comments
	1	--
	2	--
	3	--
	4	--
	5	--
	6	--
	8	--
	9	--
	10	--

4.8.4.4	**TABLE: Drop test**	—

Impact Area	Drop Distance	Drop No.	Observations
--	--	1	--
--	--	2	--
--	--	3	--

4.8.4.5	**TABLE: Impact**	—

Impacts per surface	**Surface tested**	**Impact energy (Nm)**	**Comments**
--	--	--	--
--	--	--	--
--	--	--	--

4.8.4.6	**TABLE: Crush test**	—

Test position	Surface tested	Crushing Force (N)	Duration force applied (s)
--	--	--	--
--	--	--	--
Supplementary information:			

4.8.5	TABLE: Lithium coin/button cell batteries mechanical test result		N/A
Test position	**Surface tested**	**Force (N)**	**Duration force applied (s)**
--	--	--	--
--	--	--	--
Supplementary information:			

5.2	Table: Classification of electrical energy sources						N/A
5.2.2.2 – Steady State Voltage and Current conditions							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				U (Vrms or Vpk)	I (Apk or Arms)	Hz	
Note: All condition are considered, the maximum values are shown in the above table. Steady state is considered established when the voltage or current values persist for 2 s or longer.							

5.2.2.3 - Capacitance Limits						
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters		ES Class
				Capacitance, nF	Upk (V)	
--	--	--	Normal	--	--	--
			Abnormal	--	--	
			Single fault – SC/OC	--	--	
Note: All modes are considered, the maximum values are shown in the above table.						

5.2.2.4 - Single Pulses							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Duration (ms)	Upk (V)	Ipk (mA)	
--	--	--	Normal	--	--	--	--
			Abnormal	--	--	--	
			Single fault – SC/OC	--	--	--	

5.2.2.5 - Repetitive Pulses							
No.	Supply Voltage	Location (e.g. circuit designation)	Test conditions	Parameters			ES Class
				Off time (ms)	Upk (V)	Ipk (mA)	
--	--	--	Normal	--	--	--	--
			Abnormal	--	--	--	
			Single fault – SC/OC	--	--	--	

Test Conditions:

Normal –

Abnormal -

Supplementary information: SC=Short Circuit, OC=Short Circuit

5.4.1.4, 6.3.2, 9.0, B.2.6	**TABLE: Temperature measurements**							P
	Supply voltage (V)	230V	--		--	--	--	
	Test condition	Normal	--			--	--	
	Ambient T(°C)	24.8	--	--	--	--	--	
Maximum measured temperature T of part/at:		dT (K)						Max. dT (K)
Enclosure		7.4	--	--	--	--	--	55

E-Cap-CB1		5.2	--	--	--	--	--	75
PCB near U1		7.6	--					105
E-Cap-cc2		5.4	--	--	--	--	--	75
	Supply voltage (V)	230V	--	--	--	--	--	
	Test condition	Normal	--			--	--	
	Ambient T(°C)	25.0	--	--	--	--	--	
Enclosure		7.2	--	--	--	--	--	55

Supplementary information:

Temperature T of winding:	t_1 (°C)	R_1 (Ω)	t_2 (°C)	R_2 (Ω)	T (°C)	Allowed T_{max} (°C)	Insulation class
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--

Supplementary information:

Note1: Ambient T is the actual test ambient.

Note2: Tma is the max

5.4.1.10.2	**TABLE: Vicat softening temperature of thermoplastics**		N/A
Penetration (mm).....			—
Object/ Part No./Material		Manufacturer /trademark	T softening (°C)

supplementary information:

5.4.1.10.3	**TABLE: Ball pressure test of thermoplastics**		P
Allowed impression diameter (mm)		≤ 2 mm	—
Object/Part No./Material	Manufacturer/trademark	Test temperature (°C)	Impression diameter (mm)
Plug pin holder	Xinshengyuan Electronic Technology Co., Ltd. type: XSY-1210	125	1.1

Supplementary information:

5.4.2.2, 5.4.2.4 and 5.4.3	**TABLE: Minimum Clearances/Creepage distance**						P
Clearance (cl) and creepage distance (cr) at/of/between:	Up (V)	U r.m.s. (V)	Frequency (kHz)[1]	Required cl (mm)	cl (mm)[2]	Required[3] cr (mm)	cr (mm)
Functional insulation							
Trace of L, N before F1	**420**	**250**	**<30**	**1.5**	**7.4**	**2.5**	**7.4**

Trace of F1 different polarities	420	250	<30	1.5	2.8	2.5	2.8
Reinforced insulation							
U2 primary pins to secondary metal radiator	420	250	41.32	3.0	5.0	5.0	5.8
Primary to secondary trace under transformer T1	560	250	41.32	3.0	7.2	5.0	7.2
Core of T1 to secondary metal radiator	560	250	41.32	3.0	8.7	5.0	>10.0
T1 core to U2 secondary pins	560	250	41.32	3.0	>6.0	5.0	>6.0
T1 primary winding to secondary winding	560	250	41.32	3.0	>6.0	5.0	>6.0

Supplementary information:
Note 1: See table 5.4.2.4 if this is based on electric strength test

Note 2: The all models were checked only the maximum voltage and minimum clearance & creepage distance were shown on the above table.

5.4.2.3	**TABLE: Minimum Clearances distances using required withstand voltage**	P
	Overvoltage Category (OV):	II
	Pollution Degree:	IIIb

Clearance distanced between:	Required withstand voltage	Required cl (mm)	Measured cl (mm)
Trace of L, N before F1	2500	1.5	See table 5.4.2.2, 5.4.2.4 and 5.4.3
Trace of F1 different polarities	2500	1.5	See above
Primary live parts to accessible metal enclosure	2500	1.5	See above
U2 primary pins to secondary metal radiat r	2500	3.0	See above
Primary to secondary trace under transformer T1	2500	3.0	See above
Core of T1 to secondary metal radiator	2500	3.0	See above
T1 core to U2 secondary pins	2500	3.0	See above
T1 primary winding to secondary winding	2500	3.0	See above
Primary to secondary trace under transformer T1	2500	3.0	See above

Supplementary information:

Note 4: The all models were checked only the maximum voltage and minimum clearance & creepage distance were shown on the above table.

5.4.2.4	**TABLE: Clearances based on electric strength test**	N/A

Test voltage applied between:	Required cl (mm)	Test voltage (kV) peak/ r.m.s. / d.c.	Breakdown Yes / No
--	--	--	--
--	--	--	--

Supplementary information:

5.4.4.2, 5.4.4.5 c) 5.4.4.9	**TABLE: Distance through insulation measurements**	P

Distance through insulation di at/of:	Peak voltage (V)	Frequenc y (kHz)	Material	Required DTI (mm)	DTI (mm)
Insulation tape used f or transformer	560	41.32	Polyethylene	See only 5.4.4.9	See only 5.4.4.9
Bobbin in transformer (T1)	560	41.32	Plastic	0.4	1)

Supplementary information: The all models are considered, only the maximum test voltage and minimum

distance through insulation were shown on the table.

5.4.9	TABLE: Electric strength tests		P
Test voltage applied between:	Voltage shape (AC, DC)	Test voltage (V)	Breakdown Yes / No
Functional:			
L to N (with F1 opened)	**DC**	**2500**	**No**
Internal insulation sheet between PCB trace and plug portion	**DC**	**2500**	**No**
Reinforced:			
Unit primary to secondary (output)	**DC**	**4000**	**No**
Primary to secondary of transformer T1	**DC**	**4000**	**No**
Secondary to core of transformer T1	**DC**	**4000**	**No**
Insulation tape used in and around transformer T1 (single layer)	**DC**	**4000**	**No**
Supplementary information:			

5.5.2.2	TABLE: Stored discharge on capacitors				N/A
Supply Voltage (V), Hz	Test Location	Operating Condition (N, S)	Switch position On or off	Measured Voltage (after 2 seconds)	ES Classification
--	--	--	--	--	--
--	--	--	--	--	--

Supplementary information:

X-capacitors installed for testing are:

☐ bleeding resistor rating:

☐ ICX:

Notes:

A. Test Location:

Phase to Neutral; Phase to Phase; Phase to Earth; and/or Neutral to Earth

B. Operating condition abbreviations:

N – Normal operating condition (e.g., normal operation, or open fuse); S –Single fault condition

5.6.6.2	TABLE: Resistance of protective conductors and terminations			N/A
Accessible part	Test current (A)	Duration (min)	Voltage drop (V)	Resistance (Ω)
--	--	--	--	--
--	--	--	--	--
--	--	--	--	--
Supplementary information:				

5.7.2.2, 5.7.4	TABLE: Earthed accessible conductive part	N/A
Supply voltage		—
Location	Test conditions specified in 6.1 of IEC 60990 or Fault Condition No in IEC 60990 clause 6.2.2.1 through 6.2.2.8, except for 6.2.2.7	Touch current (mA)
	1	
	2*	
	3	
	4	
	5	
	6	
	8	

Supplementary Information:

Notes:
[1] Supply voltage is the anticipated maximum Touch Voltage

[2] Earthed neutral conductor [Voltage differences less than 1% or more]

[3] Specify method used for measurement as described in IEC 60990 sub-clause 4.3

[4] IEC60990, sub-clause 6.2.2.7, Fault 7 not applicable.

[5] (*) IEC60990, sub-clause 6.2.2.2 is not applicable if switch or disconnect device (e.g., appliance coupler) provided.

6.2.2	Table: Electrical power sources (PS) measurements for classification				N/A
Source	Description	Measurement	Max Power after 3 s	Max Power after 5 s*)	PS Classification
Battery	Terminals of battery pack (short circuit of pin2 and pin 7 for U2)	Power (W) :	--	--	--
		V_A (V) :	--	--	
		I_A (A) :	--	-	

Supplementary Information:

(*) Measurement taken only when limits at 3 seconds exceed PS1 limits. Measurement taken only when limits at 5 seconds exceed PS2 limits

6.2.3.1	Table: Determination of Potential Ignition Sources (Arcing PIS)				N/A
Location	Open circuit voltage After 3 s (Vp)	Measured r.m.s current (Irms)	Calculated value (V_p x I_{rms})	Arcing PIS? Yes / No	
--	--	--	--	--	

Supplementary information:

An Arcing PIS requires a minimum of 50 V (peak) a.c. or d.c. An Arcing PIS is established when the product of the open circuit voltage (V_p) and normal operating condition rms current (I_{rms}) is greater than 15.

The output circuit is not arcing PIS as the open voltage of which is less than 50Vpeak.

6.2.3.2	Table: Determination of Potential Ignition Sources (Resistive PIS)				N/A
Circuit Location (x-y)	Operating Condition (Normal / Describe Single Fault)	Measured wattage or VA During first 30 s (W / VA)	Measured wattage or VA After 30 s (W / VA)	Protective Circuit, Regulator, or PTC Operated? Yes / No (Comment)	Resistive PIS? Yes/No
--	--	--	--	--	--

Supplementary Information:

A combination of voltmeter, VA and ammeter IA may be used instead of a wattmeter.

If a separate voltmeter and ammeter are used, the product of (VA x IA) is used to determine Resistive PIS classification.

A Resistive PIS: (a) dissipates more than 15 W, measured after 30 s of normal operation, or (b) under single fault conditions has either a power exceeding 100 W measured immediately after the introduction of the fault if electronic circuits, regulators or PTC devices are used, or has an available power exceeding 15 W measured 30 s after introduction of the fault.

8.5.5	TABLE: High Pressure Lamp		N/A
Description		Values	Energy Source Classification
Lamp type ..... :		--	—
Manufacturer ..... :		--	—
Cat no. ..... :		--	—
Pressure (cold) (MPa) ..... :		--	MS_
Pressure (operating) (MPa) ..... :		--	MS_
Operating time (minutes)..... :		--	—
Explosion method..... :		--	—
Max particle length escaping enclosure (mm)... :		--	MS_
Max particle length beyond 1 m (mm) ..... :		--	MS_
Overall result ..... :		--	

Supplementary information:

B.2.5	TABLE: Input test						N.A
U (V)	I (A)	I rated (A)	P (W)	P rated (W)	Fuse No	I fuse (A)	Condition/status
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--
Supplementary information: Equipment may be have rated current or rated power or both. Both should be measured							

B.3	TABLE: Abnormal operating condition tests							P
Ambient temperature (°C)					25			—
Power source for EUT: Manufacturer, model/type, output rating .					Refer to below			—
Component No.	Abnormal Condition	Supply voltage , (V)	Test time (ms)	Fuse no.	Fuse current, (A)	T-couple	Temp. (°C)	Observation
Output	OL	240V	7h54mins	F1	0.628→ 0.512→ 0.506→ 0.01	T1 coil	107.2	--
						T1 core	104.6	
						Outside enclosure near the top of T1	76.4	
						Outside enclosure near the bottom of T1	75.8	
						Ambient	24.5	
Supplementary information: Test table is provided to record abnormal and fault conditions for all applicable energy sources including Thermal burn injury. Column “Abnormal/Fault.” Specify if test condition by indicating “Abnormal” then the condition for a Clause B.3 test or “Single Fault” then the condition for Clause B.4.								

B.4	TABLE: Fault condition tests	N/A

Ambient temperature (°C)	25	—
Power source for EUT: Manufacturer, model/type, output rating .	See below	—

Component No.	Fault Condition	Supply voltage, (V)	Test time (ms)	Fuse no.	Fuse current, (A)	T-couple	Temp. (°C)	Observation
U1 pin 1-8	Short	264	1s	--	--	--	--	Unit shutdown immediately, no hazards, no damaged.
U1 pin 2-6	Short	264	1s	--	--	--	--	Unit shutdown immediately, no hazards, no damaged.
L1	Short	264	1s	--	--	--	--	Unit shutdown immediately, no hazards, no damaged.
Output	Short	264	1s	--	--	--	--	Unit shutdown immediately, no hazards, no damaged

Supplementary information:
For fault condition with current fuse opened, all sources listed in table 4.1.2 are evaluated and the same results were got.

Annex M	**TABLE: Batteries**	N/A
The tests of Annex M are applicable only when appropriate battery data is not available		N/A
Is it possible to install the battery in a reverse polarity position?.....		N/A

	Non-rechargeable batteries			Rechargeable batteries					
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging	
	Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.
Max. current during normal condition	--	--	--	--	--	--	--	--	---
Max. current during fault condition	--	--	--	--	--	--	--	--	--

Test results:		--
- Chemical leaks	--	N/A
- Explosion of the battery	--	N/A
- Emission of flame or expulsion of molten metal	--	N/A
- Electric strength tests of equipment after completion of tests	--	N/A

Annex M	**TABLE: Batteries**	N/A
The tests of Annex M are applicable only when appropriate battery data is not available		N/A
Is it possible to install the battery in a reverse polarity position?		N/A

	Non-rechargeable batteries			Rechargeable batteries					
	Discharging		Un-intentional charging	Charging		Discharging		Reversed charging	
	Meas. current	Manuf. Specs.		Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.	Meas. current	Manuf. Specs.
Supplementary information:									

Annex M.4	**Table: Additional safeguards for equipment containing secondary lithium batteries**	N/A

Battery/Cell No.	Test conditions	Measurements			Observation
		U	I (A)	Temp (C)	
1	Normal	--	--	--	--
2	Shorted circuit of pin 3 and pin 4 for U1	--	--	--	--
--	Normal	--	--	--	N/A
--	Single fault – SC/OC	--	--	--	N/A
Supplementary Information:					

Battery identification	Charging at T_{lowest} (°C)	Observation	Charging at $T_{highest}$ (°C)	Observation
--	--	--	--	N/A
Supplementary Information:				

Annex Q.1	**TABLE: Circuits intended for interconnection with building wiring (LPS)**	P

Note: Measured UOC (V) with all load circuits disconnected:

Output Circuit	Components	U_{oc} (V)	I_{sc} (A)		S (VA)	
			Meas.	Limit	Meas.	Limit
Output	Normal condition	5.0	2.1	30(150/48)	10.5	100

Supplementary Information:

S-C=Short circuit, O-C=Open circuit

T.2, T.3, T.4, T.5	TABLE: Steady force test				P
Part/Location	Material	Thickness (mm)	Force (N)	Test Duration (sec)	Observation
Complete EUT enclosure	Metal material	Min. 2.0	100	5S	No energy source exceed class 1 can be accessed
Supplementary information:					

T.7	TABLE: Drop tests			P
Part/Location	Material	Thickness (mm)	Drop Height (mm)	Observation
Complete EUT	Metal material	Min. 2.0	1000 mm	No energy source exceed class 1 can be accessed
Supplementary information:				

T.8	TABLE: Stress relief test				P
Part/Location	Material	Thickness (mm)	Oven Temperature (°C)	Duration (h)	Observation
Completed sample	Metal enclosure (for all sources)	Min.2.0	70	7	No damaged, the hazardous live parts cannot be touched
Supplementary information:					

ATTACHMENT TO TEST REPORT EN 62368-1 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES (Audio/video, information and communication technology equipment Part 1: Safety requirements)	
Differences according to .....:	EN 62368-1:2014
Attachment Form No. .....:	EU_GD_IEC62368_1B
Attachment Originator .....:	Intertek Semko AB
Master Attachment .....:	Date (2015-08)
Copyright © 2015 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE)	

	CENELEC COMMON MODIFICATIONS (EN)		
1	NOTE Z1		N/A
4.Z1	Protective devices included as integral parts of the equipment or as parts of the building installation:		N/A
	a) Included as parts of the equipment		N/A
	b) For components in series with the mains; by devices in the building installation		N/A
	c) For pluggable type B or permanently connected; by devices in the building installation		N/A
5.4.2.3.2.4	Interconnection with external circuit		N/A
10.2.1	Additional requirements in 10.5.1		N/A
10.5.1	RS1 compliance measurement conditions		N/A
10.6.2.1	EN 71-1:2011, 4.20 and methods and distances		N/A
10.Z1	Non-ionizing radiation from radio frequencies in the range 0 to 300 GHz		N/A
G.7.1	NOTE Z1		N/A

ZB	ANNEX ZB, SPECIAL NATIONAL CONDITIONS (EN)		
4.1.15	**Denmark, Finland, Norway and Sweden:** Class I pluggable equipment type A marking		N/A
4.7.3	**United Kingdom:** Torque test socket-outlet BS 1363, and the plug part BS 1363.		N/A
5.2.2.2	**Denmark:** Warning for high touchcurrent		N/A

5.4.11.1 and Annex G	**Finland and Sweden:** Separation of the telecommunication network from earth		N/A
5.5.2.1	**Norway:** Capacitors rated for the applicable line-to-line voltage (230 V).		N/A

5.5.6	**Finland, Norway and Sweden:** Resistors used as basic safeguard or bridging basic insulation comply with G.10.1 and G.10.2.		N/A
5.6.1	**Denmark:** Protection for pluggable equipment type A; integral part of the equipment		N/A
5.6.4.2.1	**Ireland and United Kingdom:** The protective current rating is taken to be 13 A		N/A
5.6.5.1	**Ireland and United Kingdom:** Conductor sizes of flexible cords to be accepted by terminals for equipment rated 10 A to 13 A		N/A
5.7.5	**Denmark:** The installation instruction affixed to the equipment if high protective conductor current		N/A
5.7.6.1	**Norway and Sweden:** Television distribution system isolation text in user manual		N/A
5.7.6.2	**Denmark:** Warning for high touch current		N/A
B.3.1 and B.4	**Ireland and United Kingdom:** Tests conducted using an external miniature circuit breaker or protective devices included as an integral part of the direct plug-in equipment		N/A

G.4.2	**Denmark:** Appliances rated ≤13 A provided with a plug according to DS 60884-2-D1:2011.		N/A
	Class I equipment provided with socket-outlets provided with a plug in accordance with standard sheet DK 2-1a or DK 2-5a.		N/A
	If a single-phase equipment having rated >13 A or poly-phase equipment provided with a supply cord with a plug, plug in accordance with the standard sheets DK 6-1a in DS 60884-2-D1 or EN 60309-2.		N/A
	Mains socket outlets intended for providing power to Class II apparatus rated 2,5 A in accordance with DS 60884-2-D1:2011 standard sheet DKA 1-4a.		N/A
	Other current rating socket outlets in compliance with Standard Sheet DKA 1-3a or DKA 1-1c.		N/A
	Mains socket-outlets with earth in compliance with DS 60884-2-D1:2011 Standard Sheet DK 1-3a, DK 1-1c, DK1-1d, DK 1-5a or DK 1-7a		N/A
G.4.2	**United Kingdom:** The plug part of direct plug-in equipment assessed to BS 1363		N/A
G.7.1	**United Kingdom:** Equipment fitted with a ‘standard plug’ in		N/A

	accordance with the Plugs and Sockets etc (Safety) Regulations 1994, Statutory Instrument 1994 No. 1768		
G.7.1	**Ireland:** Apparatus provided with a plug in accordance with Statutory Instrument 525: 1997, “13 A Plugs and Conversion Adapters for Domestic Use		N/A
G.7.2	**Ireland and United Kingdom:** A power supply cord for equipment which is rated over 10 A and up to and including 13 A.		N/A

ZC	ANNEX ZC, NATIONAL DEVIATIONS (EN)		
10.5.2	**Germany:** Cathode ray tube intended for the display of visual images, authorization or application of type approval and marking.		N/A
F.1	**Italy:** The power consumption in Watts (W) indicated on TV receiver and in instruction for use		N/A
	TV receivers provided with an instruction for use, schematic diagrams and adjustments procedure in Italian language.		N/A
	Marking for controls and terminals in Italian language.		N/A
	Conformity declaration according to the above requirements in the instruction manual		N/A
	First importers of TV receivers manufactured outside EEC previous conformity certification to the Italian Post Ministry and Certification number on the backcover.		N/A

Attachment II: Photo documentation

Fig. 1



Fig. 2


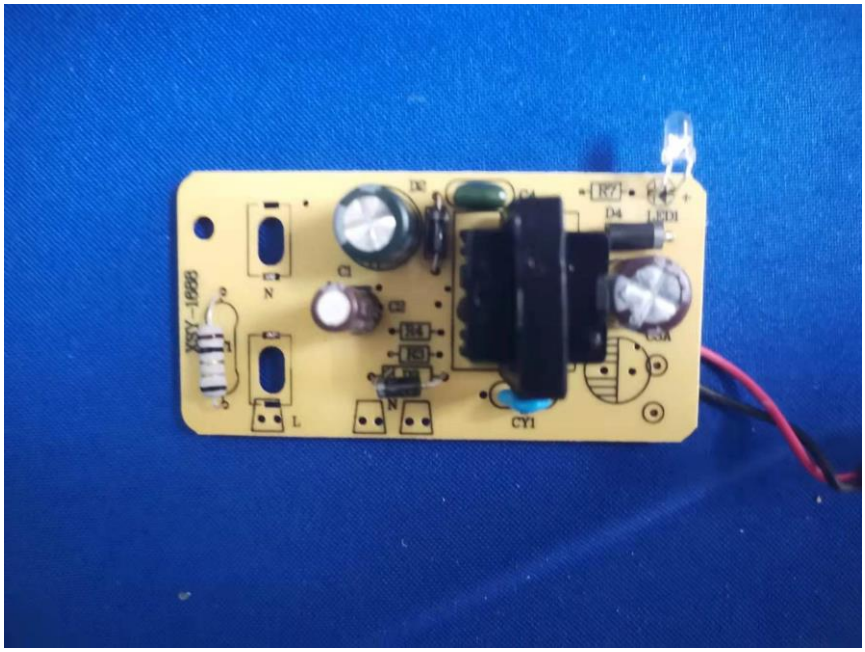


Fig. 3

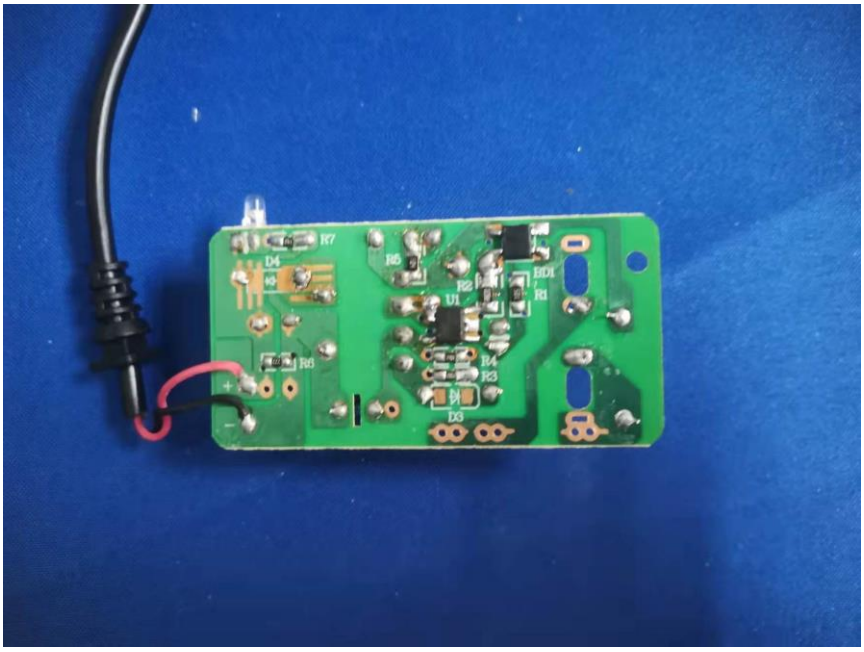

※※※※※ END OF REPORT ※※※※※